











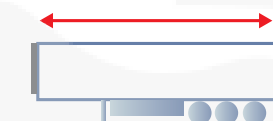


Trailer





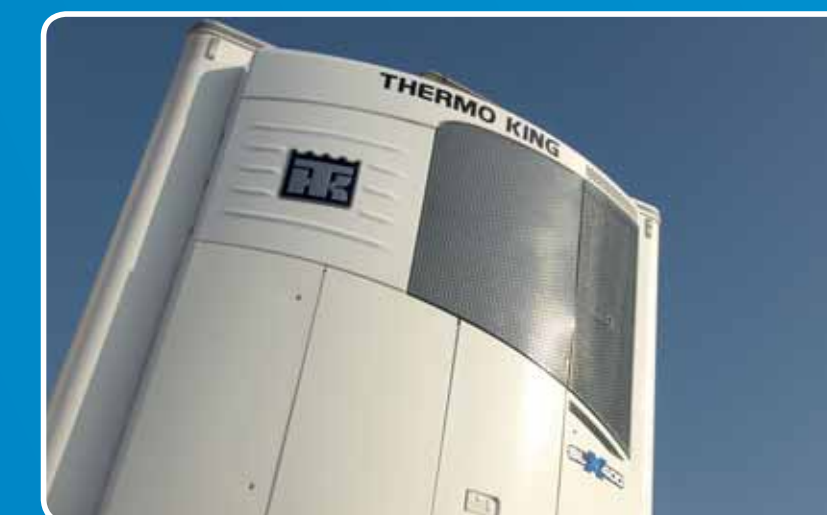

		30°C							
		-20°C Watts	0°C Watts	m ³ /h	m/s	Metres -20°C	Metres 0°C/6°C		
SLX-400		9300	17400	5500	16	16	16	772	825
SLX-300		8100	15000	5000	14	14	14	772	825
SLX-200		7800	13400	5000	14	14	14	770	825
SLX-100		5900	10000	4250	12	12	12	743	798
SLX SPECTRUM		8600	15400	5000	15	13.6	13.6	794	848
SLX WHISPER		7500	13800	4555	13	14	14	845	899








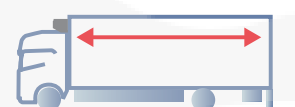



Truck

Self Powered

	30°C		 m ³ /h	 m/s	 Metres			
	-20°C Watts	0°C Watts			-20°C	0°C/6°C		
T-1200R	6900	11500	3300	6.4	8.5+	8.5+	469	526
T-1200R SPECTRUM	6400	11000	N/A	N/A	8.5+	8.5+	384	441
T-1000R	5200	8700	3200	6.2	7.5 - 8.5	7.5 - 8.5	466	523
T-1000R SPECTRUM	5600	9300	N/A	N/A	7.5 - 8.5	7.5 - 8.5	380	437
T-800R	4250	7500	2700	5.2	6.5 - 7.5	6.5 - 7.5	451	484
T-800R SPECTRUM	3850	7700	N/A	N/A	5 - 7.5	5 - 7.5	362	394
T-600R	3800	6000	2700	5.2	5.5 - 6.5	5.5 - 6.5	448	480
UT-1200X	6900	11400	3740	6.6	7.5- 9+	7.5 - 9+	-	545



CryoTech

	 30°C Capacity per evaporator/ Watts		 m ³ /h	 Capacity per evaporator/ Watts	 Metres		 330/430L 330/430L +CO ₂	
	20°C	0°C			-20°C	0°C/6°C		
CT-10 CT-10 SPECTRUM 	5200-12500	5800-13400	1360-2500	5650-6850	4.5 - 9	4.5 - 9	171/207kg	544/696kg
CT-15 SPECTRUM 	5200-7800	5800-8800	1360-2040	5650-6850	13	13	171/207kg	544/696kg






THERMO KING

Direct Drive



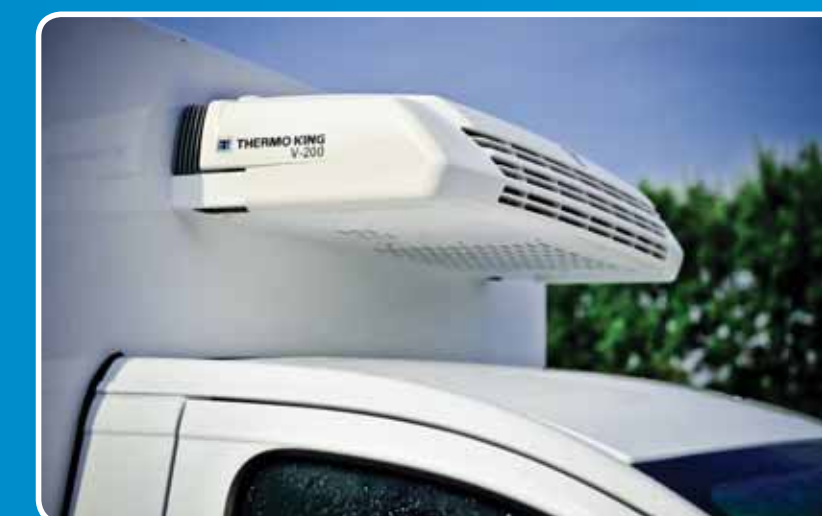



Single Temperature	30°C		m ³ /h	m		Scales	
	Return Air=-20°C	Return Air=0°C		-20°C	0°C		
V-700 MAX	3800	6950	2340	6	7,5	100	160
V-500 MAX (recip)	2735	5430	2110	5	6,5	60	132
V-500 MAX	2515	4925	2400	4,5	6	60	132
V-500 (recip)	1600	4025	2110	3	5,5	60	132
V-500	1500	3665	2400	3	5	60	132
V-400 MAX	2425	4215	1335	3	4	60	132
Multi Temperature							
V-700 MAX SPECTRUM (ES 400 + ES 400)	3707	7265	1290 x 2	up to 7	up to 7	100	160
V-700 MAX SPECTRUM (ES 500 + ES 150)	3305	6670	2200 + 790	up to 7	up to 7	100	160
V-700 MAX SPECTRUM (ES 500 + 2X ES 150)	3305	6670	2200 + (2 x 790)	up to 7	up to 7	100	160
V-500 MAX TCI (recip)	2790	4935	1150 + (2 x 750)	up to 3	up to 3	60	132
V-500 MAX TC (recip)	2790	4935	1150 + (2 x 750)	up to 3	up to 5	60	132
V-500 MAX TCI	2400	4570	1150 + (2 x 750)	up to 2.5	up to 2.5	60	132
V-500 MAX TC	2400	4570	1150 + (2 x 750)	up to 2.5	up to 5	60	132



Direct Drive



Single Temperature	30°C		 m ³ /h	m ³		 kg	
	Return Air=-20°C	Return Air=0°C		-20°C	0°C		
V-300 MAX	1820	3355	1250	17	28	25	75
V-300	1170	2800	1150	10	22	25	75
V-200 MAX	1560	2710	1070	12	21	25	75
V-200	1020	2250	1070	8	18	25	75
V-100 MAX	960	2055	695	7	15	25	43
V-100	575	1530	695	4	12	25	43
C-300	-	2800	1150	-	27	23	-
C-200	-	2250	1070	-	18	23	-
C-100	-	1530	695	-	10	23	-
B-100	390	1050	695	2,5	7	47	59
Multi Temperature							
V-300 MAX TCI	1615	2830	760 X 2	up to 8	up to 8	25	75
V-300 MAX TC	1615	2830	760 X 2	up to 8	up to 8	25	75
V-200 MAX TCI	1520	2825	695 X 2	up to 6	up to 6	25	75
V-200 MAX TC	1520	2825	695 X 2	up to 6	up to 6	25	75

